


HMI with 10" TFT Display



◆ Features

- 10" 800x480 TFT LCD, LED backlight
- Slim design
- PCB coating process ensures high reliability to resist from corrosive in harsh environment
- Fanless cooling system
- COM1 and COM3 [RS485]2W support MPI 187.5K, please use one at one time
- RS-485 dual isolation design ensures reliable operation in complex grounding application
- NEMA4/IP65 compliant front panel
- Com1 / Com3 RS485 built-in isolation


Display	Display	10" TFT
	Resolution (WxH dots)	800 x 480
	Brightness (cd/m ²)	300
	Contrast Ratio	500:1
	Backlight Type	LED
	Backlight Life Time	30,000 hr.
	Colors	262k
Touch Panel	Type	4-wire Resistive Type
	Accuracy	Active Area Length(X)±2%, Width(Y)±2%
Memory	Storage(MB)	128
	RAM (MB)	128
Processor		Faster Cortex A8 32Bit RISC 600MHz Processor
I/O Port	USB Host	USB 2.0 x 1
	Ethernet	1 RJ45 port (10/100 Base-T)
	COM Port	Com1: RS-232/RS-485 2w/4w, Com3: RS-485 2w
RTC		Built-in
Power	Input Power	24±20%V _{DC}
	Power Consumption	400mA@24VDC
	Voltage Resistance	500VAC (1 min)
	Isolation Resistance	Exceed 50MΩ at 500VDC
Specification	Vibration Endurance	10 to 25Hz(X,Y,Z direction 2G 30 minutes)
	Enclosure	Plastic
	Dimensions WxHxD	271 x 213 x 40mm
	Panel Cutout (mm)	260 x 202
	Weight (kg)	Approx.1.3 kg
Environment	Protection Structure	NEMA4 / IP65
	Storage Temperature	-20°~60°C (-4° ~ 140°F)
	Operating Temperature	0° ~ 50°C (32° ~ 122°F)
	Relative Humidity	10% ~ 90% @ 40°C (non-condensing)
Certificate		EN 55022:2010
		EN 55024:2010
		EN 61000-3-2:2006+A2:2009
		EN 61000-3-3: 2008
		AS/NZS CISPR 22:2009+A1:2010
Software		EasyBuilder Pro V3.00.01 or later versions




Top View




Side View

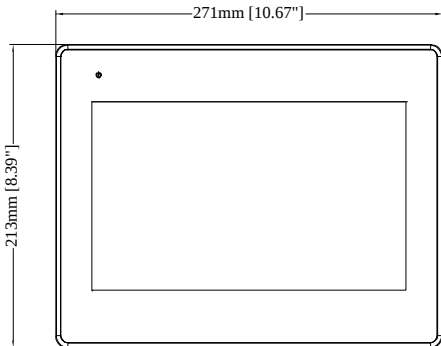


Front View

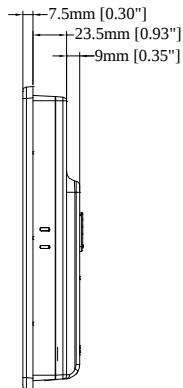


Side View

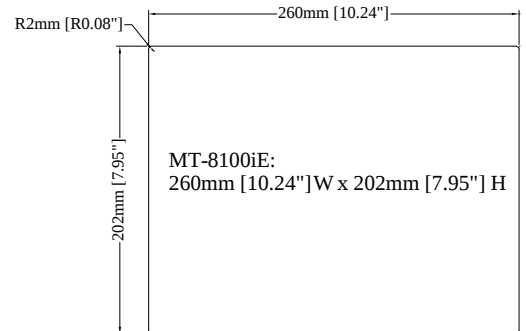

Cutout Dimensions

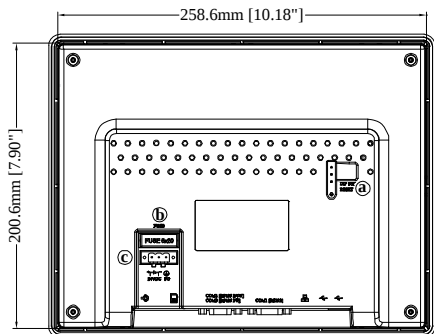

Rear View

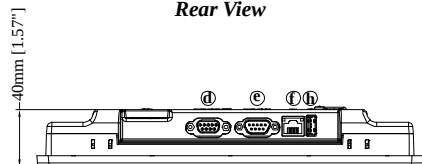

Bottom View

a	DIP SW & Reset Button
b	Fuse
c	Power Connector
d	Com1 RS485 2W/4W, Com3 RS485 2W
e	Com1 RS232
f	Ethernet Port
h	USB Host Port

COM PORT1

PIN#	Symbol	COM1[RS232]
1	Not used	
2	RxD	Received Data
3	TxD	Transmitted Data
4	Not used	
5	GND	Signal Ground
6	Not used	
7	RTS	Ready to send output
8	CTS	Clear to send input
9	Not used	

COM PORT2

PIN#	Symbol	COM1 [RS485]2w	COM1 [RS485]4w	COM3 [RS485]
1	Rx-	Data-	Rx-	
2	Rx+	Data+	Rx+	
3	Tx-		Tx-	
4	Tx+		Tx+	
5	GND1	Ground 1		
6	Not used			
7	Data-			Data-
8	Data+			Data+
9	GND2			Ground 2